




山东华力机电有限公司
Shandong Huali Electromechanical Co., Ltd.
中国. 山东. 汶上经济技术开发区
Economic development zone wensahng, shandong province, china

柴油发电机组技术参数 Diesel Generating Set Technical Specification

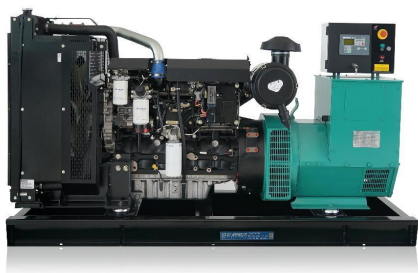

OPEN TYPE

SILENT TYPE

制造商 Manufacturer		山东华力机电有限公司 SHANDONG HUALI ELECTROMECHANICAL CO.;LTD			机组型号 Genset Model		HL80GF	
频率 Frequency		转速 Speed	电压 Voltage	功率 Power		千瓦 KW	千伏安 KVA	
50Hz		1500 rpm	400V	备用功率 Standby Power		88	110	
50Hz		1500 rpm	400V	主用功率 Prime Power		80	100	
机组尺寸、重量 Genset Dimensions and Weights		开 放 型 OPEN STYLE	尺 寸 Overall Size L×W×H, mm			2210*800*1300		
			净 重, Weight (net) kg			1150		
		静 音 型 SOUNDPROOF STYLE	尺 寸 Overall Size L×W×H, mm			3160x1210x1710		
			净 重, Weight(net) kg			2000		
Voltage regulation (电压整定范围): ≥±5%								
Voltage Regulation, Stead State (稳定电压调整率): ≤±1%								
Sudden Voltage Warp (100% Sudden Reduce) (瞬态电压偏差(100%突减功率)): ≤+25%								
Sudden voltage Warp(Sudden Increase) (瞬态电压偏差(突加功率)): ≤-20%								
Voltage Stable Time (100% Sudden Reduce) (电压稳定时间(100%突减功率)): ≤6S								
Voltage Stable Time(Sudden Increase) (电压稳定时间(突加功率)): ≤6S								
Frequency Regulation, Stead State (稳态频率调整率): ≤5%								
Frequency Waving (频率波动率): ≤1.5%								
Sudden Frequency Warp (100%Sudden Reduce) (瞬态频率偏差(100%突减功率)): ≤+12%								
Sudden Frequency Warp (Sudden Increase) (瞬态频率偏差(突加功率)): ≤-10%								
Frequency Recovery Time (100%Sudden Reduce) (频率恢复时间(100%突减功率)): ≤5S								
Frequency Recovery Time (Sudden Increase) (频率恢复时间(突减功率)): ≤5S								
发 动 机 DIESEL ENGINE								
发动机型号 Engine Model		1104C-44TAG2						
制造商 Manufacturer		PERKINS ENGINE COMPANY LIMITED 铂金斯动力有限公司						
发动机转速 Engine speed (rpm)	工作状态 Type of Operation	发电输出功率 Typical Generator Output (Net)		发动机功率 Engine Power				
				Gross 毛功率		Net 净功率		
		kVA	kW	kW	bhp	kW	bhp	
1500	常用 Primer Power	101.4	81.4	93.6	125.5	90.1	120.8	
	备用 Standby Power	111.9	89.6	103.0	138.0	99.5	133.4	
缸数 Number of cylinders		4		气缸排列 Cylinder arrangement		立式直列 Vertical in-line		
循环周期 cycle		4 冲程 4-cycle		进气方式 Aspiration		涡轮增压 Turbocharged		
燃烧方式 Combustion system		直接喷射 Direct injection		缸径 Bore(mm)		105		

Specifications may change without notice

参数更改不再另行通知



山东华力机电有限公司
Shandong Huali Electromechanical Co., Ltd.
中国. 山东. 汶上经济技术开发区
Economic development zone wensahng, shandong province, china

冲程 Stroke (mm)	127		压缩比 Compression ratio	18.2:1	
排量 Displacement, total (L)	4.41		冷却方式 Cooling system	水冷 Water cooled	
冷却液总容量 Total coolant capacity	12.6L		润滑油总容量Total Lubrication (L)	8.0	
净重 Engine weight,dry (kg)	550				
工作状态 Type of Operation	g/kWh	L/hr	工作状态 Type of Operation	g/kWh	L/hr
备用功率 Standby power	205	24.9	75% 常用功率 75% prime power	207	17.1
常用功率 prime power	205	22.6	50% 常用功率 50% prime power	204	11.2

发电机参数 ALTERNATOR SPECIFICATION

制造商 Manufacturer	无锡斯坦福 WUXI STAMFORD	发电机型号 Alternator Model	UCI274C14
频率 Frequency	50 HZ	额定转速 Rated Speed (RPM)	1500
电压调节 Voltage Regulation	±5%	额定电压 Prime Voltage (V)	400
相数 Number of Phase	3	海拔要求 Altitude	≤1000m
功率因数 Power Factor	0.8	防护等级 Protection Grade	IP23
接线方式 Connecting Type	3 Phase and 4 Wires 三相四线	励磁方式 Exciter Type	Brush less, self-exciting 无刷自励磁
绝缘等级 Insulation Class	H	温升等级 Temperature Rise	H
电话影响系数 TIF	<50	电话谐波系数 THF	<2%

控制系统 CONTROL SYSTEM

工作环境: (Work environment)

工作温度 Operating temperature : -20℃~60℃ 相对湿度 Relative Humidity : 95%
工作电压 Operating voltage : DC24V (范围 range : 18-30V, 耐压 pressure : 50V/5 mm)

开架式 Open Type		静音型 Silent Type	
------------------	---	--------------------	---

模块描述 Description

标准功能 Standard functions	停机 Shutdown	报警 Warning
发动机控制 Engine Control 发电机组监测 Generator Monitoring 机组保护 Generator Protection 发动机监测 Engine Monitoring 测试显示清理 Clear Text Display	降速显示 Loss of Speed Signal 发电机欠压/过压 Alternator Under / Over Voltage 发电机低频/超频 Alternator Under/ Over Frequency 市电欠压/过压 Mains Under / Over Voltage 市电低频/超频 Mains Under/ Over Frequency 低速/超速 Under / Over Speed 低油压 Low Oil Pressure 发动机高温 High Engine Temperature 电子相序(可选) Phase Sequence Electrical (Option) 接地故障 (可选) Earth Fault (Option)	发电机欠压/过压 Alternator Under / Over Voltage 发电机低频/超频 Alternator Under/ Over Frequency 市电欠压/过压 Mains Under / Over Voltage 市电低频/超频 Mains Under/ Over Frequency 低速/超速 Under / Over Speed 低油压预警 Low Oil Pressure Pre-Alarm 发动机高温预警 High Engine Temperature Pre-Alarm 电池电压过高/过低 High/Low Battery Voltage 过流 Over-current 定期维护 Periodic maintenance

Specifications may change without notice
参数更改不再另行通知